




HomeGuard® Commercial & Residential - RS

Woven • Perforated • Water-Resistive Barrier • Superior Drainage

HomeGuard® - RS is the Smart Choice

HomeGuard® - RS is engineered with drainage tendrils woven vertically in the fabric which provides drainage channels and creates an air space between the exterior cladding and wall sheathing. Why is this important?

The exterior cladding is the first line of defense against water intrusion: however, moisture will penetrate all exterior claddings creating the need for a secondary layer of protection. The drainage channels in HomeGuard - RS help the water move down and out from the wall and the airspace helps promote the drying process between the sheathing and the exterior cladding.

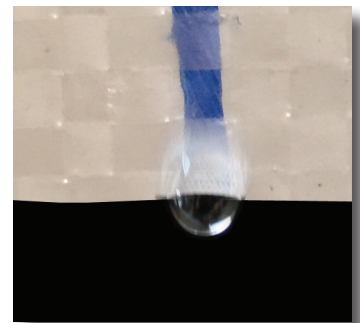

Vertically Woven
Filaments
Improve Drainage

The Facts! HomeGuard - RS

- **Certified Drainage Material - Passes Drainage Efficiency Test ASTM E-2273**
- **Meets Drainage Plane Requirements of ORSC 703.1.1, Exception 1**
- **Water-Resistive Barrier complies with ICC Acceptance Criteria 38 and ORSC R703.2**

HomeGuard - RS

The smart solution behind exterior claddings for commercial and residential construction:

- EIFS and Stucco
- Fiber Cement, Hardboard, Vinyl, and Wood Sidings
- Brick and Stone Veneer

***please remember to install all housewraps in accordance with proper building codes*

The Data

Test	Method	Units	HomeGuard®-RS	Minimum Requirement
Tensile Strength				
Machine Direction	ASTM D 5035	lbs.	105	20
Cross Direction	ASTM D 5035	lbs.	95	20
Drainage Efficiency	ASTM E 2273	AC38, Section 4.3	98%	90%
Water Resistance	ASTM D 779	Minutes	Pass	10 Minutes
Water-vapor Transmission	ASTM E 96 [A+B]	Perms	12	5
Low Temperature Bend	AC38 Section 3.3.4	N/A	Pass	Pass
UV Exposure	AC38 Section 4.1.2	N/A	6 Months	4 months

15 YEAR LIMITED WARRANTY HomeGuard® Weather Barrier System

Combine **HomeGuard® Housewraps** with **HomeGuard RA-Plus Flashing or Arctic-Flash Synthetic, HomeGuard Flexible Butyl Flashing, HomeGuard MS-Polymer Sealant and HomeGuard Seam Tape** to create an energy efficient, complete weather barrier system backed by a 15-year limited warranty.

HomeGuard RA-Plus Flashing-Rubberized Asphaltic flashing with excellent adhesion to most surfaces. Suitable for windows, doors, vents and most thru wall openings. UV Resistant for 180 days. Made in the USA.

HomeGuard Arctic-Flash-Extreme performance synthetic flashing with advanced acrylic adhesive provides a wide install temperature range from -20° F to extreme heat. UV Resistant for 180 days. Made in the USA.

HomeGuard Flexible Butyl Flashing-High performance flexible butyl adhesive flashing for arched windows and doors, window sills and custom shaped penetrations. UV Resistant for 180 days. Made in the USA.

HomeGuard MS-Polymer Sealant-Advanced STP-E polymer chemistry provides a superior bond to most substrates. Use it to seal windows, doors, column joints, gutters, vents/ducts and most molding, trim and siding. Compatible with HomeGuard weather barrier products. Made in the USA.

HomeGuard Seam Tape-UV Protected facer material with aggressive acrylic adhesive designed for sealing the seams of HomeGuard Housewraps.

HomeGuard - RS Housewrap Roll Sizes and Quantities

9' x 150' - 54 rolls/pallet


HomeGuard®
Commercial & Residential - RS

5430 Shawland Road • Jacksonville, FL 32254
Office: 904.240.1382 • Fax: 866.337.4016

www.HomeGuardBuildingProducts.com

HomeGuard - RS


ESR-3774
CCMC 13424-R

